


# ABLELED

lighting solution

LED PANELS



# World famous material

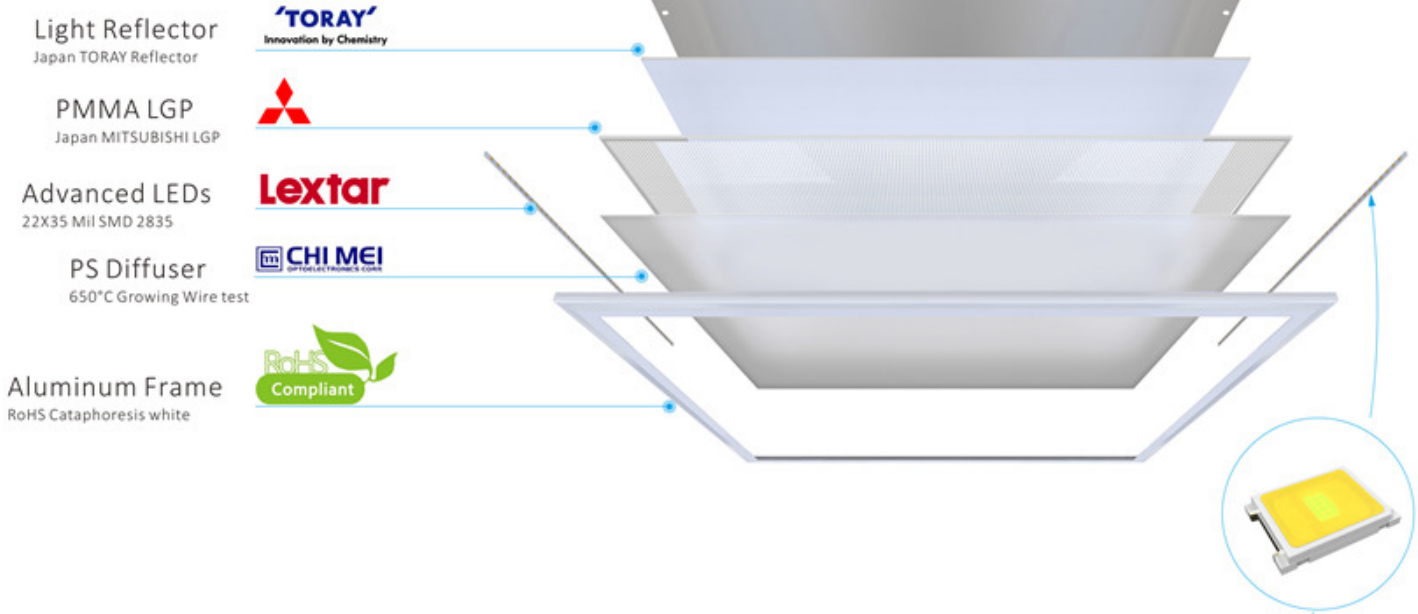

LED INTERIOR LIGHTING

## What's our advantage? **Customize per your demand**

-  RGBW Panel
-  CCT Panel
-  IP65 waterproof panel
-  DC12V & DC24V Panel
-  With Border Panel
-  High bright-130Lm/W panel
-  UP and Down light Panel
-  Dimmable--DALI, Traic, 0-10V, PWM
-  Remote Control
-  Different size/Watt/shape/function can be customized

01

LED PANELS





LED PANEL SQUARE




Watt	model number:	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Size (mm)			Functional choice
					D	H	D1	
18W	3030-18	2500	3000-6000	white/silver	30	11	30	dimming,RGBW,CCT,IP65
24W	3030-24	2980	3000-6000	white/silver	30	11	30	dimming,RGBW,CCT,IP65
36W/40W	6060-40	4960	3000-6000	white/silver	60	11	60	dimming,RGBW,CCT,IP65
48W	6060-48	5500	3000-6000	white/silver	60	11	60	dimming,RGBW,CCT,IP65
72W	6060-72	8950	3000- 6000	white/silver	60	11	60	dimming,RGBW,CCT,IP6
36W/40W	30120-40	4960	3000- 6000	white/silver	30	11	120	dimming,RGBW,CCT,IP65
48W	30120-48	5520	3000- 6000	white/silver	30	11	120	dimming,RGBW,CCT,IP65
72W	30120-72	8980	3000- 6000	white/silver	30	11	120	dimming,RGBW,CCT,IP65
72W	60120-72	8980	3000- 6000	white/silver	60	11	120	dimming,RGBW,CCT,IP65
95W	60120-95	14100	3000- 6000	white/silver	60	11	120	dimming,RGBW,CCT,IP65



INSTALLATION ACCESSORIES FOR LED PANELS Suspension wire for suspended mounting

Spring clips for plasterboard build-in Fasteners for surface mounting




Panel frame for 595/595 mm 300/300mm 300/1200mm 600/1200mm ceiling mounting aluminium

Suitable for mounting in suspended ceiling Armstrong type (in grid ceilings)  
**Body:** aluminium | **Light source:** Epistar SMD2835 | **Starting time:** <0.5s | **Power factor:** λ>0.9 LED panels can be dimmed using a suitable dimmable driver and remote control.



# LED INTERIOR LIGHTING

## LED PANELS



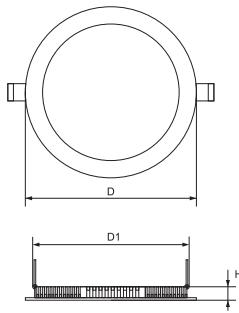


### LED PANEL ROUND



Watt	model No.	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Size (mm)			Light body color
					D	H	D1	
24W	R300-24	2980	3000-6000	satın nickel	300	15	280	white/silver
18W	R240-18	2500	3000-6000	satın nickel	240	15	220	white/silver
21W	R225-21	2750	3000-6000	satın nickel	225	15	205	white/silver
10W	R145-10	1310	3000-6000	satın nickel	145	15	125	white/silver

**Body:** aluminium | **Light source:** Epistar SMD2835 | **Starting time:** <0.5s | **Power factor:** λ>0.8  
 Easy installation due to handy clips | Recessed mounted luminaire.



### LED PANEL ROUND-SML




Watt	model No.	Whole fixture lumens (lm)	Colour temp. (K)	Colour body	Size (mm)		Light body color
					D	H	
24W	R300-24	2980	3000-6000	satın nickel	300	45	white/silver
18W	R240-18	2500	3000-6000	satın nickel	240	45	white/silver
21W	R225-21	2750	3000-6000	satın nickel	225	45	white/silver
10W	R145-10	1310	3000-6000	satın nickel	145	45	white/silver


**Body:** aluminium | **Light source:** Epistar SMD2835 | **Starting time:** <0.5s | **Power factor:** λ>0.8  
**SML** - surface mounted luminaire





### Installation Accessories Kit-1: Metal suspending wire



### Installation Accessories Kit-2: Spring fastener



### Installation Accessories Kit-3: Ceiling mounting frame

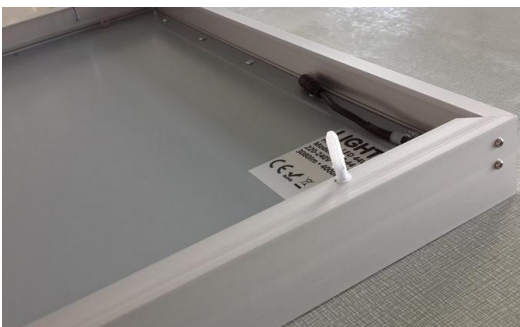

595x595 mm

